

# Molecular antiferroelectric/ferroelectric systems for capacitive energy storage

Supervisors: Samy Boukari/Benoit Gobaut/Victor Da Costa

Institut de physique et chimie des matériaux de Strasbourg

23 rue du Loess, 67034 Strasbourg, FRANCE


[samy.boukari@ipcms.unistra.fr](mailto:samy.boukari@ipcms.unistra.fr), [benoit.gobaut@ipcms.unistra.fr](mailto:benoit.gobaut@ipcms.unistra.fr), [victor.dacosta@ipcms.unistra.fr](mailto:victor.dacosta@ipcms.unistra.fr)

Organic ferroelectric thin films possess great potential for future electronic devices due to certain advantages over their inorganic counterparts: being environmentally benign, less expensive, biocompatible, easier and simpler to fabricate. As organic material, they are naturally lead-free and thus can be considered in the context of eliminating toxic substances from electronic devices as a lead-free alternative to inorganic ferroelectrics.


Ferroelectrics and antiferroelectrics are interesting for energy storage, in particular because dielectric capacitors exhibit high power density (Fig1), so that in the past two decades, enormous efforts have been made to improve their energy-storage performances [SUN19].

We propose to investigate the energy storage potential of capacitors based on two oxocarbon acids, croconic acid and squaric acid. The ferroelectric properties of these materials were only discovered recently [HOR10, HOR18] and their potential has to be explored further, in particular as thin films. These materials are promising in particular because, in its crystal form, croconic acid has the highest room-temperature polarization among organic ferroelectrics, on par with standard inorganic materials; and for squaric acid because antiferroelectric materials are capable of displaying higher energy densities than ferroelectric ones [LIU18]

The PhD work will be divided in three steps: i) thin film fabrication under ultra-high vacuum by sublimation on several substrates (Au, Co...), ii) study of their local ferroelectric properties by piezo force microscopy (fig.2, MOH20) and iii) incorporation in submicrometer devices thanks to a homemade lithographic process [KAT21].

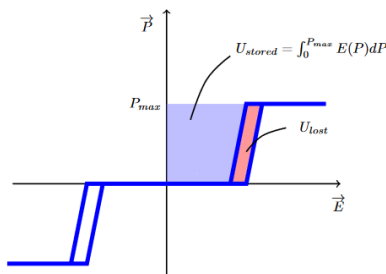

**Fig1:** energy storage principle on antiferroelectric with hysteresis

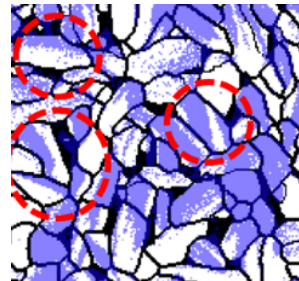

**Fig 2:** ferroelectric characterization of a 200-nm thick croconic acid film on ferromagnetic cobalt. (piezo-force microscopy). red dashed circles show some multi-domain grains. Area of  $\sim 1\mu\text{m} \times 1\mu\text{m}$  [moh20]

Applicants should have (or expect to be awarded) a first class master's degree with sufficiently high grades in a relevant science subject (e.g. condensed matter physics, materials science, physics, etc.).

## Bibliography :

[HOR10] Horiuchi *et al.* Nature **463** (2010) 798.

[HOR18] Horiuchi *et al.* Chem. Sci. **9** (2018) 425.

[KAT21] Katcko *et al.* Adv. Funct. Mater. **31** (2021) 2009467.

[LIU18] Liu *et al.* Adv. Mater. Technol. (2018) 1800111

[MOH20] Mohapatra *et al.* Mater. Adv. **1** (2020) 415–420 and Nanoscale (2021).

[SUN19] Zixiong Sun *et al.* Adv. Electron. Mater. (2019) 1900698.